
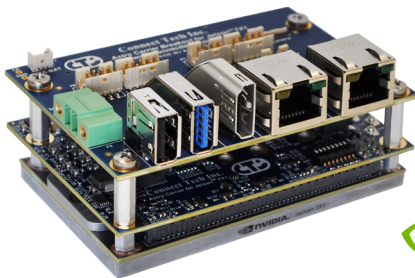


Astro Carrier for NVIDIA® Jetson™ TX2 and Jetson™ TX1

Astro is specifically designed to work with the NVIDIA® Jetson™ TX2 or TX1 supercomputer-on-module. The Astro Carrier provides access to features found on the Jetson TX2/TX1 module in an extremely small footprint (87mm x 57mm/3.43" x 2.24"). It makes use of a high density, board-to-board connector that allows for use with Connect Tech's off the shelf or custom designed break out boards.

Product Name: Astro Carrier for NVIDIA® Jetson™ TX2/TX1
Part Number: ASG001

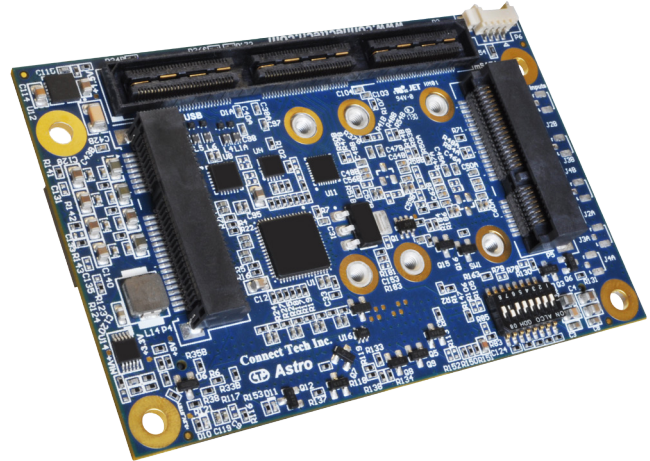

Shown with Jetson TX1 module
and breakout board XBG201



FEATURES

- ✓ 2 Gigabit (10/100/1000) Ports
- ✓ USB and HDMI Ports
- ✓ Use with COTS or custom break out boards
- ✓ 87mm x 57mm (3.43" x 2.24")
- ✓ Extended Temperature Range -40°C to +85°C (Astro Carrier)

Specifications

Compatibility	NVIDIA Jetson TX2, NVIDIA Jetson TX1
Dimensions	87mm x 57mm (3.43" x 2.24")
Mini PCIe Expansion	<ul style="list-style-type: none"> • 1x half size card or 1x full length card • PCIe and USB signaling (MiniPCIe)
Storage	1x mSATA, half size card
USB	<ul style="list-style-type: none"> • 1x USB 3 port • 2x USB 2 ports
Network	2x Gigabit (10/100/1000) Ports: <ul style="list-style-type: none"> • 1 from the Jetson TX1 Module • 1 from on-board Intel 82574 PHY/Controller
GPIO	4-bit GPIO
Display	1x HDMI interface
Audio	<ul style="list-style-type: none"> • HD Audio • 1x stereo output
Serial	2x RS-232/485 hardware selectable ports
Video Input	• 1x MIPI CSI-2 (on breakout board layer)
Misc. External Interfaces	<ul style="list-style-type: none"> • I2C • System Control (PWR and RST buttons, etc.) • RTC battery input
Connectors	• 90-pin QSH Samtec connector to be mated to Connect Tech Inc. breakout boards
Weight	<ul style="list-style-type: none"> • ASG001 (Astro Carrier): 46 grams (with stand-offs attached) • XBG201 (Breakout Board): 51 grams • Jetson TX2/TX1: 144 grams (with heatsink); 75 grams (without heatsink)
Environmental¹	-40°C to +85°C (-40°F to +185°F)

[1] The Jetson TX1 Module is rated for -25°C to +80°C (measured at thermal heat plate)